








同軸プローブ


- ・～6GHzまで対応
- ・VSWR：1.15typ 1.30(max)
- ・その他カスタム応相談



シングル（ピッチ幅固定）

0.9mm	1.0mm	1.27mm	2.0mm	2.54mm		MHF
				通常	フランジ付き	
						
 P0.9×2=1.8 7 2 0.4	 P1.0×2=2 7 2 0.4 2.02	 P1.27×2=2.54 7 2 0.48 2.02	 P2.0×2=4 7 2 0.48	 7.95 2.54 5.08	 7.95 2.54 5.08	 0.75
CP400-05	CP400-09	CP400-01	CP400-04	CP320-01	CP365-01	CP600-MHF01

シングル（ピッチ幅可変）

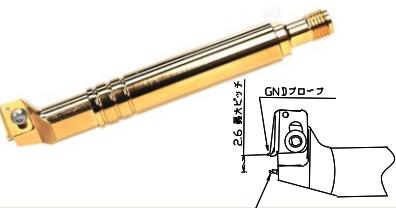0.5~2.6mm	1.5/2.0/2.5mm	1.5/2.0/2.5/3.5/5.1mm
 CP690-01 シングルプローブ 2.6mmピッチ GNDプローブ	 CP1000-01 1.5(1.2) 2.5(3) 3.2 1.5(1.2)	 CP1000-04 3.5 3.2


差動

1.0mm	2.54mm	5.08mm
 CP1000-07 シグナル GND シグナル GND 6.6	 CP1000-03 シグナル GND シグナル GND 7	 CP1000-05 シグナル GND シグナル GND 10.16 9.4 5.08

使いやすいペン型



■交換可能な先端ピン

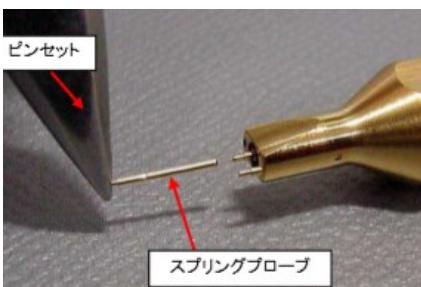

■固定用ポジショナー



ご希望のピッチ幅、先端形状の変更など
カスタム対応も可能
【例】

- ・デュアル（2連型）
- ・フローティング機能付き
- ・超小型プローブ etc..