Torque Wrench

TRQ-516-08

Features

- Lab quality
- Accuracy
- Precise preset torque
- Prevent over or under tightening
- · Light weight, easy to use
- SMA, 3.5mm, 2.92mm, 2.4mm, 1.85mm connectors



CASE STYLE: MY2727

Product Overview

Mini-Circuits' Precise Break-over Torque Wrench TRQ-516-08 allows for precise mating force and easy use in tight spaces. The head will break over to signal the user when preset torque is achieved. It will effectively prevent over/under tightening.

Product Specifications


Wrench Torque	8±0.32 inch-lbs (0.9±0.04 NM)	
Wrench Size	8.0 mm (5/16 inches)	
Wrench Head	Stainless steel	
Color	Blue Handle	
Handle	Aluminum blue anodized	
Length	6.44±.030	
Weight	83.05 gms	

The wrench kit consists of:

- (1) Break-over torque wrench
- (2) Calibration certificate*
- (3) A solid wooden instrument case

*Recommended duration of calibration is one year. Calibration intervals set by national and international standards are either one year or 5000 cycles, whichever comes first. However, to ensure that the performance is in accordance to factory calibrated standards, actual need of calibration may vary based on use. Contact AM or RMA for recalibration.

Outline Drawing

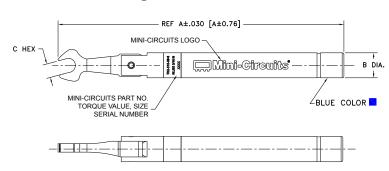

Outline Dimensions (inch mm)

wt	С	В	Α
grams	.313	.563	6.44
83.05	8.0	14.3	163 6

Compliance

Performance standards are in compliance with ANSI/NCSL Z540 and ISO 10011

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and manufacture.

C. The parts covered by this specification document are subject to Mini-Circuit's applicable established test performance criteria and manufacture. Ferrormance and updany authorities and contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp